




WN NEEDLE SHOWER NOZZLES

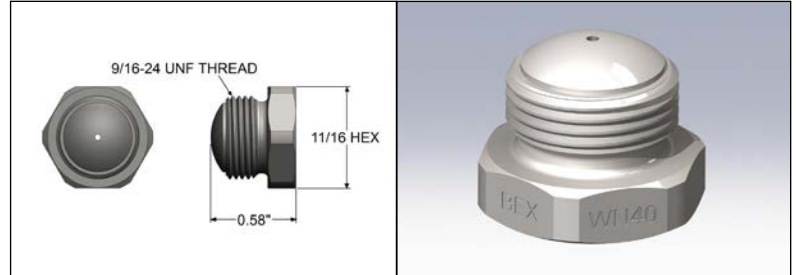

SPRAY CHARACTERISTICS:

Available in flat fan and solid stream (0 degree) models, these self-cleaning nozzles reduce shower maintenance. By reducing the supplied pressure, an internal piston retracts to purge fibers and other suspended solids from the clogged nozzle.

CONSTRUCTION:

Standard material of construction is 316 stainless steel.

TYPICAL APPLICATIONS:

- Cleaning Fabric (wire)
- Cleaning Felts
- Pre-wetting Showers
- Knock-off Showers
- Lubrication Shower

Standard thread size is 11/8" - 20.

Model	Orifice Dia. (in)	CAPACITY AT VARIOUS PRESSURES (USGPM)						
		40 psi	60 psi	80 psi	100 psi	300 psi	600 psi	900 psi
WN14	0.014	0.06	0.07	0.08	0.09	0.15	0.21	0.26
WN28	0.028	0.11	0.14	0.16	0.17	0.30	0.43	0.52
WN33	0.033	632	775	894	1000	1732	2449	3000
WN40	0.040	528	646	746	834	1445	2043	2502
WN55	0.055	400	490	566	632	1095	1549	1897
WN70	0.070	309	379	437	489	846	1197	1466
WN94	0.094	231	283	327	365	632	894	1095
WN125	0.125	179	219	253	283	490	693	849